


T...

TUBO TRAFILATO LUCIDO A FREDDO
COLD DRAWN BRIGHT TUBE

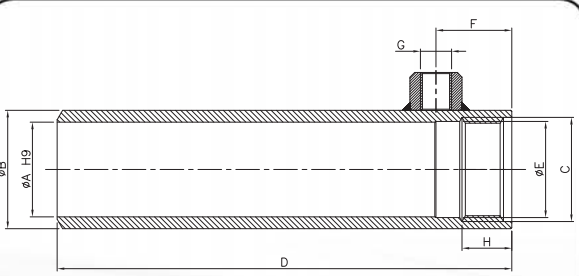


TUBO FILETTATO CON BORCHIA SALDATA
THREADED TUBE WITH WELDED BOSS

- MATERIALE
Acciaio E355
(EN 10305-2/DIN 2393 S152.3)
- MATERIAL
Steel E355
(EN 10305-2/DIN 2393 S152.3)

SIGLA CODE	Ø A	Ø B	CORSA STROKE	C	D	Ø E	F	G	H	PESO WEIGHT kg.
T 040050100	40	50	100	M44x1.5	192	40,6	32	G1/4"	21	1,09
T 040050150	40	50	150	M44x1.5	242	40,6	32	G1/4"	21	1,37
T 040050200	40	50	200	M44x1.5	292	40,6	32	G1/4"	21	1,65
T 040050250	40	50	250	M44x1.5	342	40,6	32	G1/4"	21	1,93
T 040050300	40	50	300	M44x1.5	392	40,6	32	G1/4"	21	2,20
T 040050350	40	50	350	M44x1.5	442	40,6	32	G1/4"	21	2,48
T 040050400	40	50	400	M44x1.5	492	40,6	32	G1/4"	21	2,76
T 040050450	40	50	450	M44x1.5	542	40,6	32	G1/4"	21	3,04
T 040050500	40	50	500	M44x1.5	592	40,6	32	G1/4"	21	3,32
T 040050550	40	50	550	M44x1.5	642	40,6	32	G1/4"	21	3,59
T 040050600	40	50	600	M44x1.5	692	40,6	32	G1/4"	21	3,87
T 050060100	50	60	100	M54x1.5	202	50,6	35	G3/8"	24	1,41
T 050060150	50	60	150	M54x1.5	252	50,6	35	G3/8"	24	1,75
T 050060200	50	60	200	M54x1.5	302	50,6	35	G3/8"	24	2,09
T 050060250	50	60	250	M54x1.5	352	50,6	35	G3/8"	24	2,43
T 050060300	50	60	300	M54x1.5	402	50,6	35	G3/8"	24	2,77
T 050060350	50	60	350	M54x1.5	452	50,6	35	G3/8"	24	3,11
T 050060400	50	60	400	M54x1.5	502	50,6	35	G3/8"	24	3,45
T 050060450	50	60	450	M54x1.5	552	50,6	35	G3/8"	24	3,79
T 050060500	50	60	500	M54x1.5	602	50,6	35	G3/8"	24	4,12
T 050060550	50	60	550	M54x1.5	652	50,6	35	G3/8"	24	4,46
T 050060600	50	60	600	M54x1.5	702	50,6	35	G3/8"	24	4,8
T 050060700	50	60	700	M54x1.5	802	50,6	35	G3/8"	24	5,48
T 050060800	50	60	800	M54x1.5	902	50,6	35	G3/8"	24	6,16
T 060070100	60	70	100	M64x1.5	217	60,6	40	G3/8"	29	1,78
T 060070150	60	70	150	M64x1.5	267	60,6	40	G3/8"	29	2,18
T 060070200	60	70	200	M64x1.5	317	60,6	40	G3/8"	29	2,58
T 060070250	60	70	250	M64x1.5	367	60,6	40	G3/8"	29	2,98
T 060070300	60	70	300	M64x1.5	417	60,6	40	G3/8"	29	3,38
T 060070350	60	70	350	M64x1.5	467	60,6	40	G3/8"	29	3,78
T 060070400	60	70	400	M64x1.5	517	60,6	40	G3/8"	29	4,18
T 060070450	60	70	450	M64x1.5	567	60,6	40	G3/8"	29	4,58
T 060070500	60	70	500	M64x1.5	617	60,6	40	G3/8"	29	4,98
T 060070550	60	70	550	M64x1.5	667	60,6	40	G3/8"	29	5,39
T 060070600	60	70	600	M64x1.5	717	60,6	40	G3/8"	29	5,79
T 060070800	60	70	800	M64x1.5	917	60,6	40	G3/8"	29	7,39
T 063073300	63	73	300	M68x1.5	417	63,6	40	G3/8"	26	3,54
T 063073500	63	73	500	M68x1.5	617	63,6	40	G3/8"	26	5,21
T 063073600	63	73	600	M68x1.5	717	63,6	40	G3/8"	26	6,05
T 063073800	63	73	800	M68x1.5	917	63,6	40	G3/8"	26	7,72

T...

TUBO TRAFILATO LUCIDO A FREDDO
COLD DRAWN BRIGHT TUBE

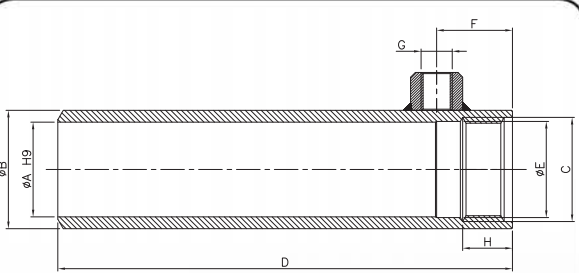

TUBO FILETTATO CON BORCHIA SALDATA
THREADED TUBE WITH WELDED BOSS

- MATERIALE
Acciaio E355
(EN 10305-2/DIN 2393 S152.3)
- MATERIAL
Steel E355
(EN 10305-2/DIN 2393 S152.3)

SIGLA CODE	Ø A	Ø B	CORSA STROKE	C	D	Ø E	F	G	H	PESO WEIGHT kg.
T 070080100	70	80	100	M74x1.5	217	70,6	40	G3/8"	29	2,05
T 070080150	70	80	150	M74x1.5	267	70,6	40	G3/8"	29	2,51
T 070080200	70	80	200	M74x1.5	317	70,6	40	G3/8"	29	2,97
T 070080250	70	80	250	M74x1.5	367	70,6	40	G3/8"	29	3,44
T 070080300	70	80	300	M74x1.5	417	70,6	40	G3/8"	29	3,9
T 070080350	70	80	350	M74x1.5	467	70,6	40	G3/8"	29	4,36
T 070080400	70	80	400	M74x1.5	517	70,6	40	G3/8"	29	4,82
T 070080450	70	80	450	M74x1.5	567	70,6	40	G3/8"	29	5,29
T 070080500	70	80	500	M74x1.5	617	70,6	40	G3/8"	29	5,75
T 070080550	70	80	550	M74x1.5	667	70,6	40	G3/8"	29	6,21
T 070080600	70	80	600	M74x1.5	717	70,6	40	G3/8"	29	6,67
T 070080800	70	80	800	M74x1.5	917	70,6	40	G3/8"	29	8,52
T 080092200	80	92	200	M85x2	335	80,6	50	G1/2"	35	4,31
T 080092250	80	92	250	M85x2	385	80,6	50	G1/2"	35	4,95
T 080092300	80	92	300	M85x2	435	80,6	50	G1/2"	35	5,59
T 080092400	80	92	400	M85x2	535	80,6	50	G1/2"	35	6,86
T 080092500	80	92	500	M85x2	635	80,6	50	G1/2"	35	8,13
T 080092600	80	92	600	M85x2	735	80,6	50	G1/2"	35	9,4
T 080092800	80	92	800	M85x2	935	80,6	50	G1/2"	35	11,95