


4FC... FORCELLE YOKES

- MATERIALE 9 SMnPb28, ZINCATA
- MATERIAL 9 SMnPb28, GALVANIZED

CNOMO 06 07 13



SIGLA CODE	PASSO DEL FILETTO THREAD LEAD	a	VALORI TOLLERANZA TOLERANCE VALUES		b	g	d ₁	VALORI TOLLERANZA TOLERANCE VALUES							PESO WEIGHT		
			a (B12)					d ₁ (H9)								kg.	
4FC 8x22	10x1,5	11	+0,150	+0,300	22	22	8	+0,022	0	18	14	0,5	45	36	16		0,5
4FC 12x26	16x1,5	18	+0,150	+0,330	26	36	12	+0,027	0	26	17	1	64	51	25	1	0,250
4FC 16x34	20x1,5	22	+0,160	+0,370	34	45	16	+0,033	0	34	18,5	1	80	63	33	1	0,550
4FC 20x42	27x2	30	+0,160	+0,370	42	63	20	- +0,033	0	48	30	1	105	85	40	1	1,460
4FC 25x50	36x2	40	+0,170	+0,420	50	80	25	+0,039	0	60	45	1	140	115	40	1	3,270

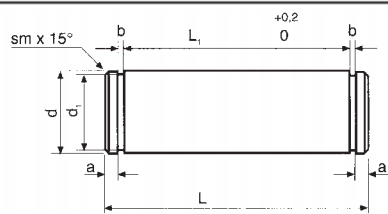

PFC... PERNI PER FORCELLE PINS FOR YOKES

- MATERIALE 9 SMnPb28, ZINCATO
- MATERIAL 9 SMnPb28, GALVANIZED



CNOMO 06 07 13

SIGLA CODE	d (h11)	L	d ₁	L ₁	a	b	PESO WEIGHT
							Kg.
PFC 8	8	27	7,45	22,2	1,5	0,9	0,015
PFC 12	12	43	11,2	36,2	2,2	1,2	0,026
PFC 16	16	53	14,9	45,2	2,7	1,2	0,061
PFC 20	20	72	18,7	63,2	2,9	1,4	0,118
PFC 25	25	89	23,5	80,6	2,7	1,5	0,230